

WE HAVE MORE THAN 30 YEARS OF EXPERIENCE, DEVELOPING DIRECT CURRENT COMPRESSORS AND HELPING CUSTOMERS BENEFIT FROM THE OPPORTUNITIES OF MOBILE REFRIGERATION TECHNOLOGY.

WITH A DEEP INSIGHT OF THE USAGE ACROSS VARIOUS APPLICATIONS WE HAVE EARNED A POSITION AS MARKET LEADER, WORKING WITH OEM-CUSTOMERS .

CONTROLLER FOR BD COMPRESSORS

SE COP

OPERATING INSTRUCTIONS 101N07xx Series, 24 V DC



TABLE OF CONTENTS

1. Introduction	4
1.1 Applications.....	4
1.2 Capability.....	4
1.3 Functions.....	4
1.4 Programming Interface	4
2. Installation	5
2.1 Checklist	5
2.2 Connect Cables.....	6
2.3 Install and Configure Software.....	8
3. TOOL4COOL® Software Interface	14
3.1 User Interface	14
3.2 Operation.....	14
4. Parameters	15
4.1 Parameter Overview	15
4.2 Description of Parameters.....	18
5. Ordering	26

1. INTRODUCTION

1.1 Applications

The BD350GH 24 V DC compressor system is intended mainly for in parking anti-idle applications. Secondary applications could be:

- Spot cooling in buses, golf carts, smaller boats, forklifts, campers etc
- Air cargo cooling
- Cooling of switchboards and batteries in radio stations for cellular phones



1.2 Capability

The cooling capacity of the compressor is approx. 900 Watt @ $P_e/P_c \sim +15/+55^\circ\text{C}$
The system is able to operate in ambient temperatures up to $+55^\circ\text{C}$ (131 F).
The operating conditions are High Back Pressure (HBP).

1.3 Functions

The main functions of the controllers are:

- Motor / Compressor speed control
- Thermostat control (ON / OFF or electronic via NTC temperature sensor)
- ECO function to optimize compressor speed for minimum power consumption
- Condenser fan control
- Evaporator fan control
- Communication interface
- Monitoring function
- Error & event log
- Battery protection functions
- Main Switch
- Log of specific parameters
- Optimization of specific parameters via PC software before commencing mass production

1.4 Programming Interface

The controller can be accessed using either

- The Secop software tool, Tool4Cool® LabEdition, or
- A custom interface. Please contact Secop for further information regarding custom interfaces.




2. INSTALLATION

Installation involves the following steps:

- Checklist
- Cable connection
- Software installation and configuration

2.1 Checklist


Check that you have the following:

<p>BD electronic controller 101N07xx Series 24V DC</p> <ul style="list-style-type: none"> • 101N0715 • 101N0710 (discontinued) 	
<p>Tool4Cool® LabEdition software download: www.secop.com/tool4cool.html</p>	
<p>NTC temperature sensor (alternative: mechanical thermostat)</p>	
<p>Product key for BD compressor controller</p>	<p>- on request -</p>
<p>Secop One Wire/LIN gateway with connection cables</p> <ul style="list-style-type: none"> • Gateway • One Wire/LIN gateway communication cable • USB 2.0 A/B cable 	

Ordering: See section 5

2.2
Connect Cables

Wiring diagram

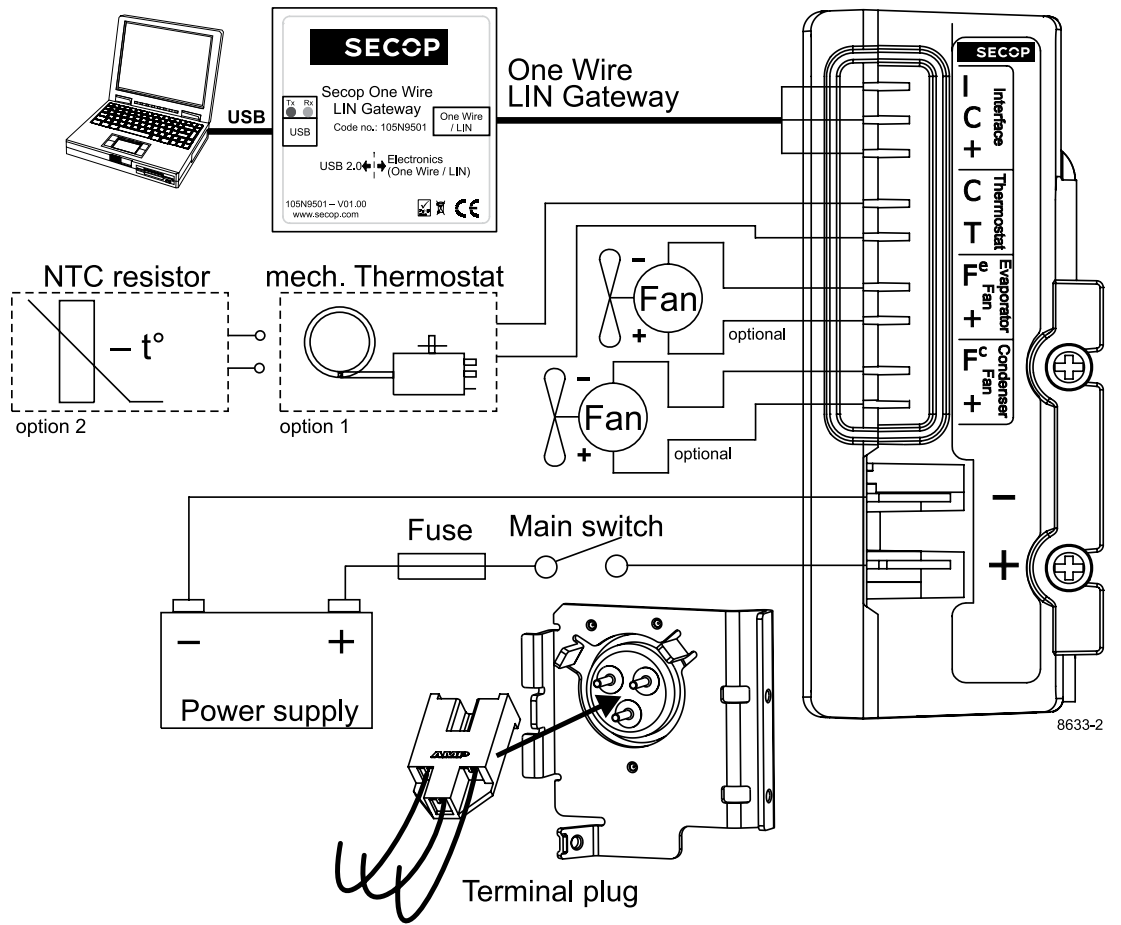

The compressor control unit has the following connections:

I, C, + Modbus data communication. I = communication C & + power supply.

C, T Thermostat connection. A Secop NTC temperature sensor (option 2) can be connected or a mechanical ON/OFF thermostat (option 1)

Fe, + Evaporator fan (Optional) 24 V DC, 0-24 V, max 60 Watt power output, pulse width modulated.

Fc, + Condenser fan (optional) 24 V DC, 0-24 V, max 40 Watt power output, pulse width modulated.

-, + Main supply voltage. Nominal voltage 24 V DC, range: 17 to 31.5 V DC

Wire dimensions

Size		Max. length* 24V operation	
Cross section	AWG		
[mm ²]	[Gauge]	[m]	[ft.]
2 x 4	11	1.5	4.92
2 x 6	9	2	6.60

* Length between battery and electronic unit


2.3
Install and Configure
Software

2.3.1 Install Software

1. Check that you have the latest update of .NET Framework from www.windowsupdate.com.
2. Insert the Tool4Cool® installation CD.
This view will appear:

SETTING THE STANDARD

SECOPI



TOOL4COOL®

[Tool4Cool® Software Installation \(please click\) Version 2.01](#)

Note: If above link fails to run setup, please run executable *setup.exe* in installation folder i.e. default folder of CD.


Minimum system requirements:

- PC with min. 1 GHz Intel Pentium III processor or equivalent, and min. 500MB available memory
- PC operating system: Microsoft Windows XP, Windows Vista or Windows 7 with the latest patches and updates for Windows released by Microsoft.
- .NET Framework with the latest patches and updates for .NET Framework released by Microsoft (www.microsoft.com/.NET). If .NET is not installed and if the PC is connected online Tool4Cool® will try to install it.


PDF Files:

- [Tool4Cool® Software Disclaimer \(please read\)](#)
- [Tool4Cool® Operating Instructions](#)

Adobe® Acrobat Reader



3. Double-click Tool4Cool® Software Installation. Run the file setup.exe. Then follow the instructions in the Setup Wizard.

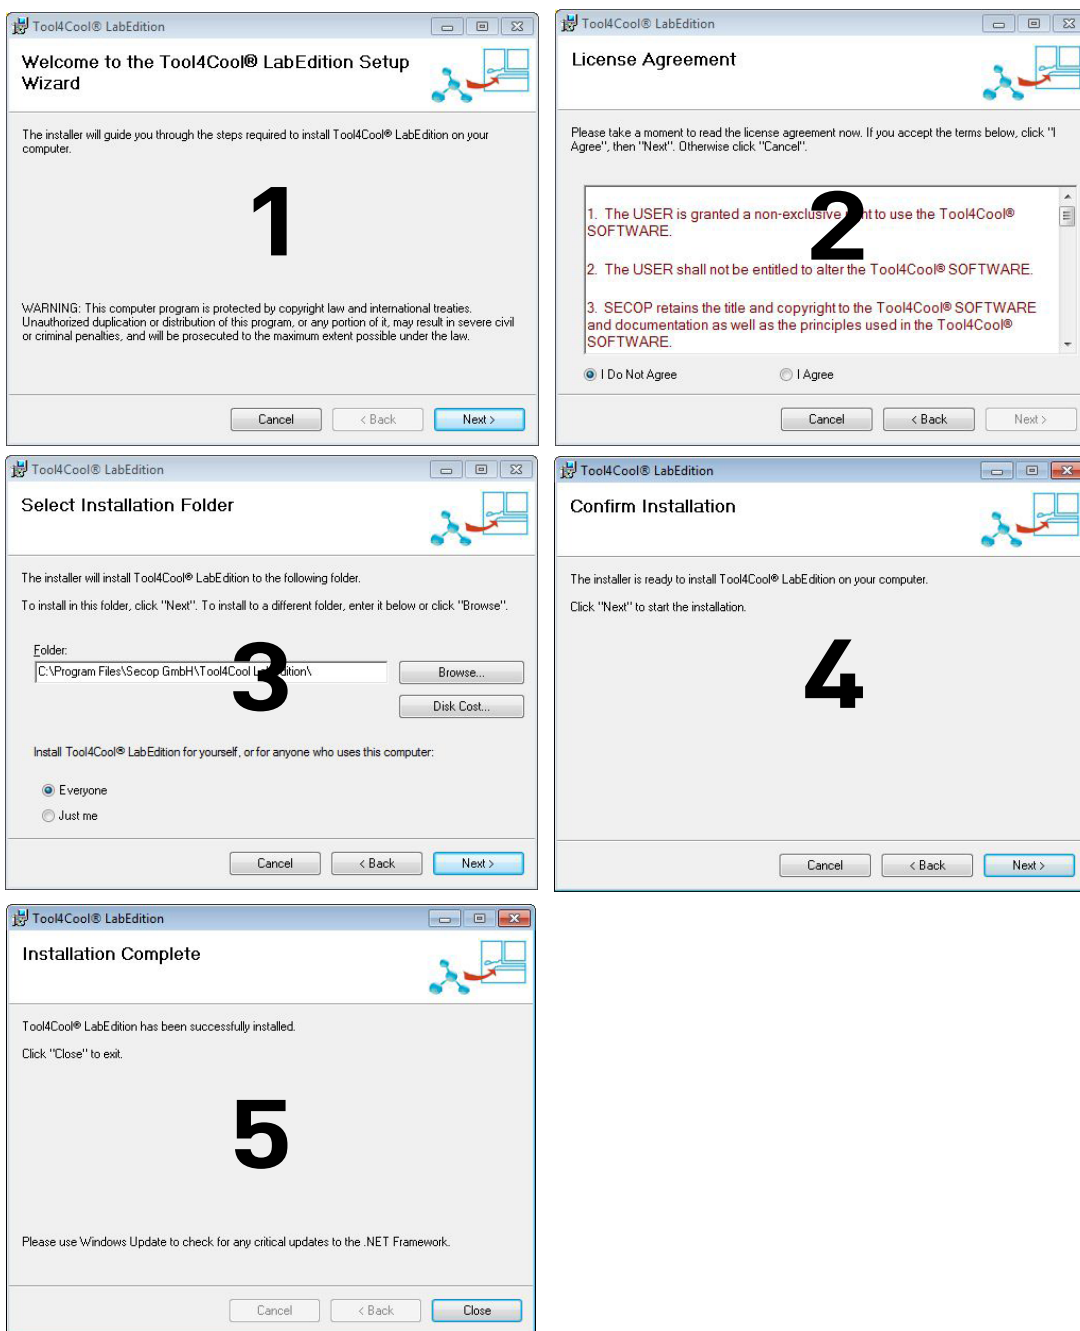

For detailed instructions please refer to Tool4Cool® LabEdition Operating Instructions. This manual is supplied with the Tool4Cool® software.


2.3.2 Install Product Key

1. Start Tool4Cool® LabEditon by double clicking on the icon on the desktop:




2. Select Help in the menu bar.

3. Select Product Keys from the drop-down menu:




4. This dialog box will open:

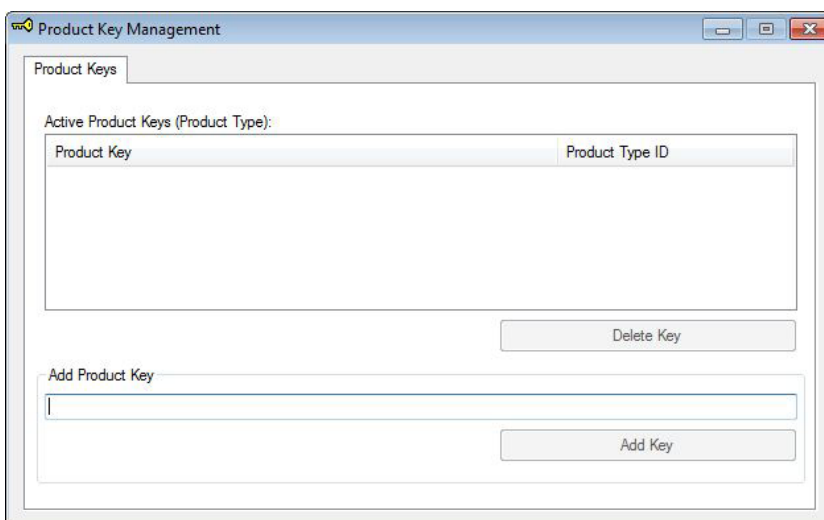


In the Add Product Key field, type the Product Key shown in Section 2.1: Checklist. Click the Add Key button. The Product Key is now active.

2.3.3 Connect Network

1. Select File in the menu bar.
2. Select Connect Network in the drop-down menu:

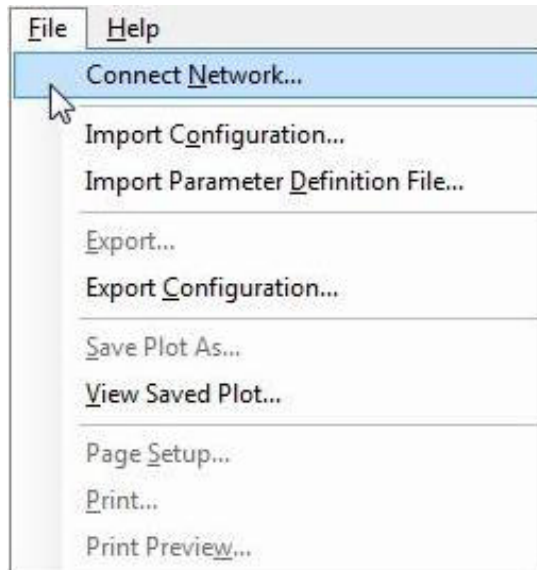

3. This dialog box will open:

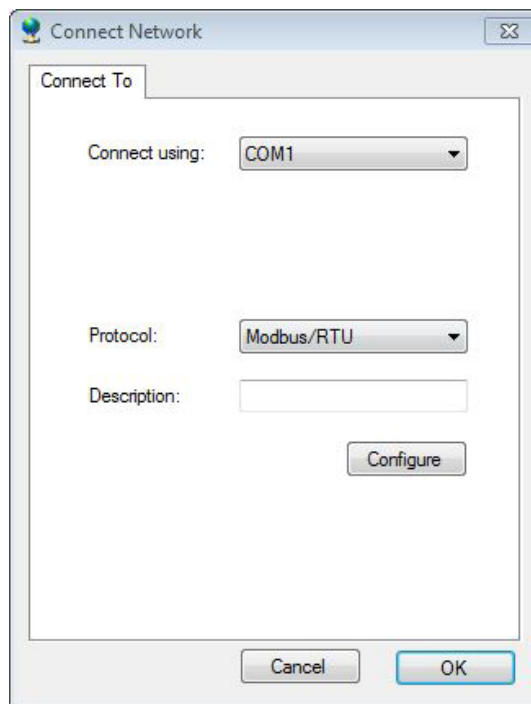


In the Connect using field, select the COM port to which the gateway is connected.

Fill in Description (optional).

Press OK.


Wait a short time. The LEDs on the gateway will flash, then a red arrow will appear in front of the description (COM1).

The controller is now accessible via Tool4Cool®.

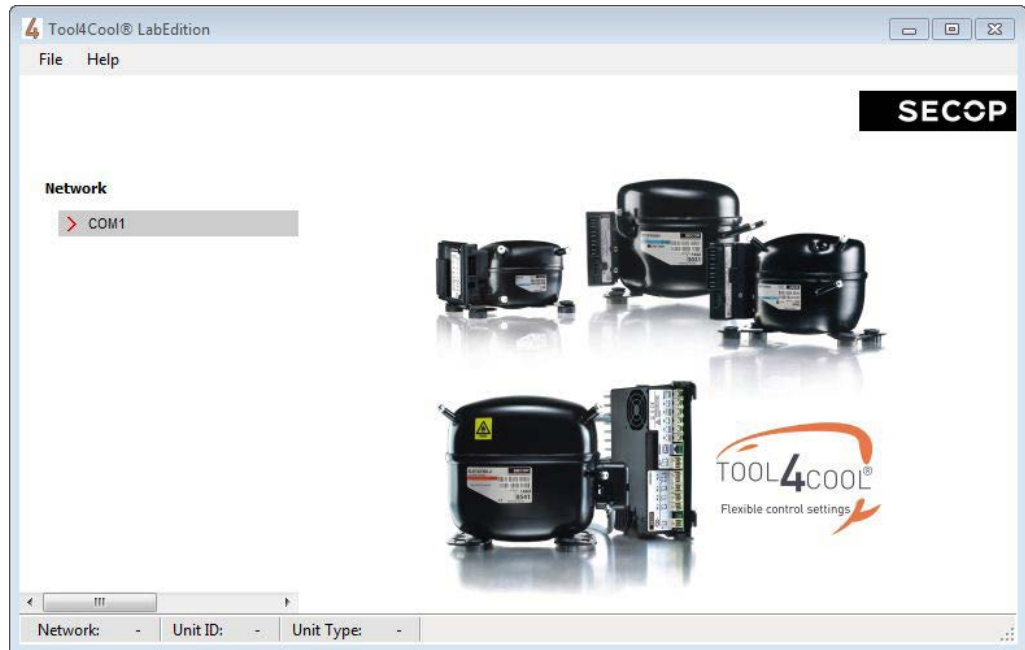


2.3.4 Ready to Operate

Click the red arrows to view the controller and its parameter groups:

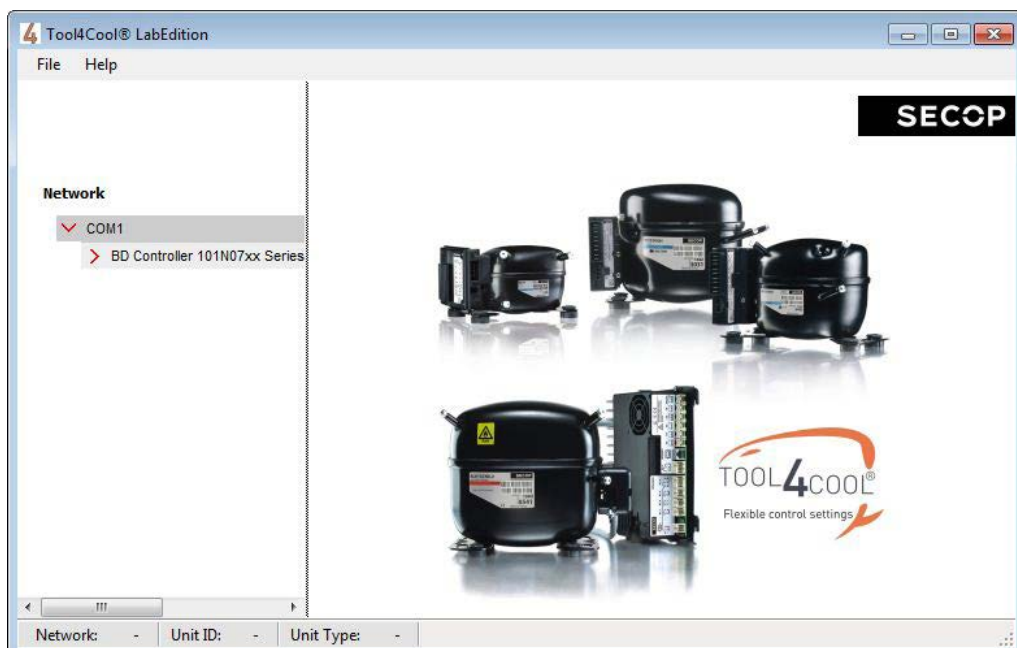

Click a parameter group name to view details to the right of the screen:

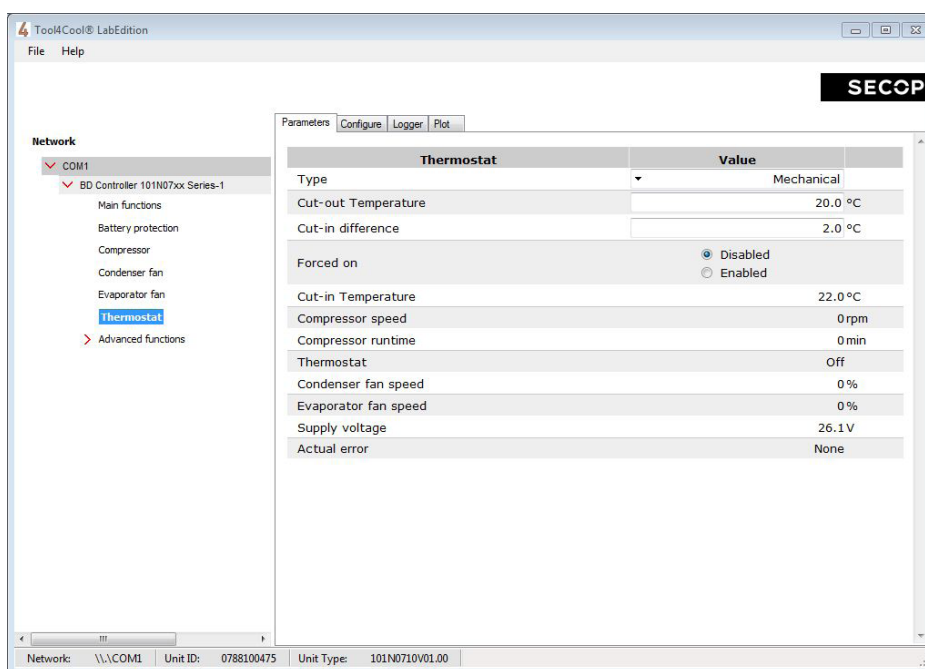


TOOL4COOL® SOFTWARE INTERFACE

3.1 User Interface

The controller can be programmed and optimized from a PC using the Tool4Cool® software. An example of the Tool4Cool® user interface showing the main parameter groups of the BD Controller 101N07xx Series 24V DC is shown below.

Example:

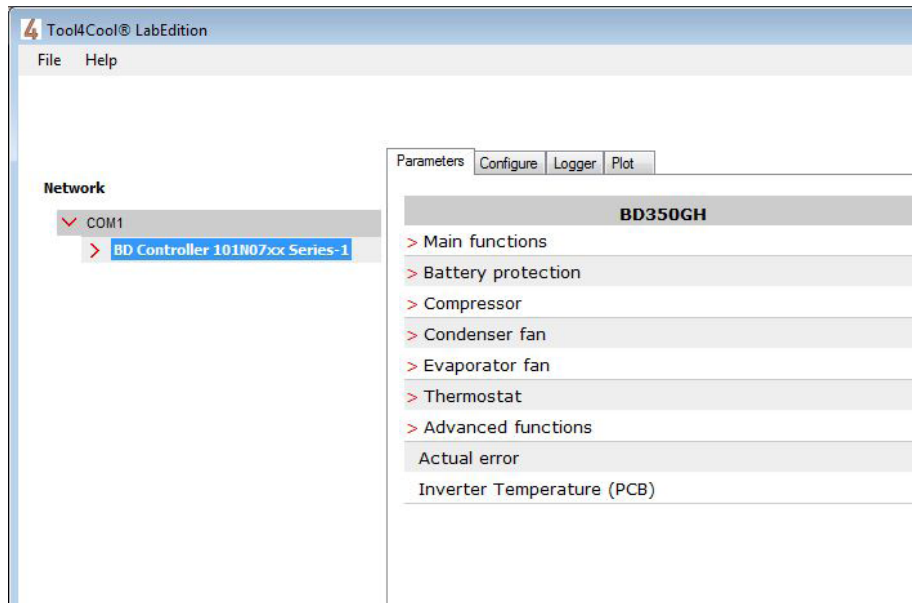

3.2 Operation

The Tool4Cool® software enables the user to observe and document certain aspects of the compressor operation via the controller. The output of the software is in the form of data logs and plots.

Using Tool4Cool® the user can also change the settings of the controller parameters, and copy settings from one controller to another.

Please refer to the Tool4Cool® LabEdition Operating Instructions for operation instructions.

PARAMETERS

The user can change settings and observe real-time measurements (read-only) in the following parameters.

The table in 4.1 Parameter Overview is intended for easy reference.

For more detail, please refer to 4.2 Description of Parameter Groups.

4.1

Parameter Overview

Parameter Group	Parameter	Description	De-fault	Max value	Min value	Step	Unit	Type
Main functions	Main switch	On/Off regulation of power supply to controller	OFF	ON	OFF	1		
Battery protection	Battery cutout level	Battery protection cut-out voltage level	21.3	27	19	0.1	Volt	Setting
	Battery cutin diff.	Voltage difference between battery cut-in and cut-out	3.9	10	0.5	0.1	Volt	Setting
	Cutout delay	Time to cut-out when non-critical battery protection implemented	3	60	0	1	Seconds	Setting
	Cut-in level	Calculated value. Cutin = Cutout + Diff.				0.1	Volt	Measurement
	Supply voltage	Real-time voltage measured on + & - terminals				0.1	Volt	Measurement
Compressor	Requested speed	Compressor speed and therefore capacity definition	4000	4000	2500	100	rpm	Setting
	Start delay	Time to start after compressor is switched ON	4	240	2	1	Seconds	Setting
	Start speed	Optional startup speed lower than Requested speed, during the period Start time.	2500	4000	2500	100	rpm	Setting
	Start time	Period of time elapsing after startup of compressor until Requested speed is reached	30	600	0	1	Seconds	Setting
	Compressor speed	Real-time speed (+/- 10%)				1	rpm	Measurement
Condenser fan	Cond. Fan voltage	Supply voltage to the condenser fan.	24	31	12	1	Volt	Setting
	Fan speed	Condenser fan speed synchronized with compressor operation	100	100	40	10	%	Setting
	Fan start delay	Time to start as a function of Thermostat	0	240	0	1	Seconds	Setting
	Fan stop delay	Time to stop as a function of Thermostat	0	240	0	1	Seconds	Setting
	Fan forced ON	Force condenser fan continuously ON or OFF	OFF	ON	OFF	1		Setting
	Detect missing fan	Detect whether condenser fan is connected	OFF	ON	OFF	1		Setting
	Fan speed	Real-time condenser fan speed				1	%	Measurement

Parameter Group	Parameter	Description	Default	Max value	Min value	Step	Unit	Type
Evaporator fan	Evap. Fan voltage	Supply voltage to the evaporator fan.	24	31	12	1	Volt	Setting
	Fan speed	Evaporator fan speed synchronized with compressor operation.	100	100	40	10	%	Setting
	Fan start delay	Time to fan start as a function of Thermostat	0	240	0	1	Seconds	Setting
	Fan stop delay	Time to fan stop as a function of Thermostat	0	240	0	1	Seconds	Setting
	Fan forced ON	Force evaporator fan continuously ON or OFF	OFF	ON	OFF	1		Setting
	Detect missing fan	Detect whether evaporator fan is connected	OFF	ON	OFF	1		Setting
	Fan speed	Real-time evaporator fan speed				1	%	Measurement
Thermostat	Thermostat type	Detect mechanical or NTC sensor thermostat	Auto	Electro- nic				Setting
	Cutout temperature	Compressor cuts out below cutout temperature	+25	+40	-40	1	Celsius (°C)	Setting
	Difference		3	15	1	1	Kelvin (K)	Setting
	Forced ON	Force thermostat operation to continuously ON or OFF	OFF	ON	OFF	1		Setting
	Runtime	During cooling OFF (Thermostat cut-out), the Runtime will show the time for the last cooling period. Runtime is reset at cooling ON period. At power-up the reading is reset.				1	Minutes	Measurement
	Actual temperature	Real-time air temperature when an NTC sensor is used. When a mechanical thermostat is used, only thermostat status ON or OFF is displayed.					°C	Measurement
Compressor safety	Compressor re-start time	Delay before restart after short cycling	60	120	60	1	Seconds	Setting
Communication	Node Number	Modbus address	1	247	1	1		Setting
	Bits per seconds	Communication speed	19200	19200	9600	9600	bps	Setting
	Communication options	0 = Disabled 1 = Enabled	0	1	0	1		Setting
	Communication timeout	Maximum duration of each communication attempt	900	7200	15	1	seconds	Setting
	Setting protection code & status	Privacy function code must be entered twice	0	9999	0	1		Setting
Product information	Unit name	The user's own identification name for the unit can be entered here (optional)						Setting
	Vendor name	Vendor name						Measurement
	Product code no	Secop product code number						Measurement
	Software version	Controller software version						Measurement
	Unit ID	Secop unit ID						Measurement
	Production date	Secop production date						Measurement
	Lot no	Secop lot no.						Measurement
Serial no	Secop serial no.						Measurement	

Parameter Group	Parameter	Description	Default	Max value	Min value	Step	Unit	Type
Customer register	Register 1	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 2	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 3	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 4	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 5	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 6	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 7	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 8	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 9	Custom-designed interface parameter	65535	65535	0	1		Setting
	Register 10	Custom-designed interface parameter	65535	65535	0	1		Setting
Actual error	Actual error	0 = No error 1 = Voltage failure 2 = Fan failure 3 = Motor failure 4 = Min. speed failure 5 = Max. speed failure 6 = Thermal failure 7 = NTC Sensor Failure						Measurement
Inverter temperature (PCB)	Inverter temperature (PCB)	Controller overheating protection					°C	Measurement
	Compressor restart delay	Delay before restart after overheating of inverter	60	120	60	1	Seconds	Setting

4.2 Description of Parameters

4.2.1 Main Functions

In order to start and stop the compressor the Main Switch can be set to ON or OFF . OEMs making an interface with custom design electronics via Modbus must be able to control the CCU ON / OFF via the Main Switch (CCU = Compressor Control Unit).

- ON: All functions are active.
 OFF: All main functions are inactive, however
- Battery monitoring active
 - NTC temperature sensor monitoring active
 - PCB inverter temperature monitoring active


Settings:

Name	Default	Max value	Min value	Step	Unit
Main switch	ON	ON	OFF	1	-

4.2.2 Battery Protection

The battery protection serves to avoid permanent damage to the battery by discharge.

The setting range is from 19 to 27 V DC.
 Critical stop without delay if voltage drops below 17 V DC or exceeds 31.5 V DC
 Tolerances are ± 0.30 V DC

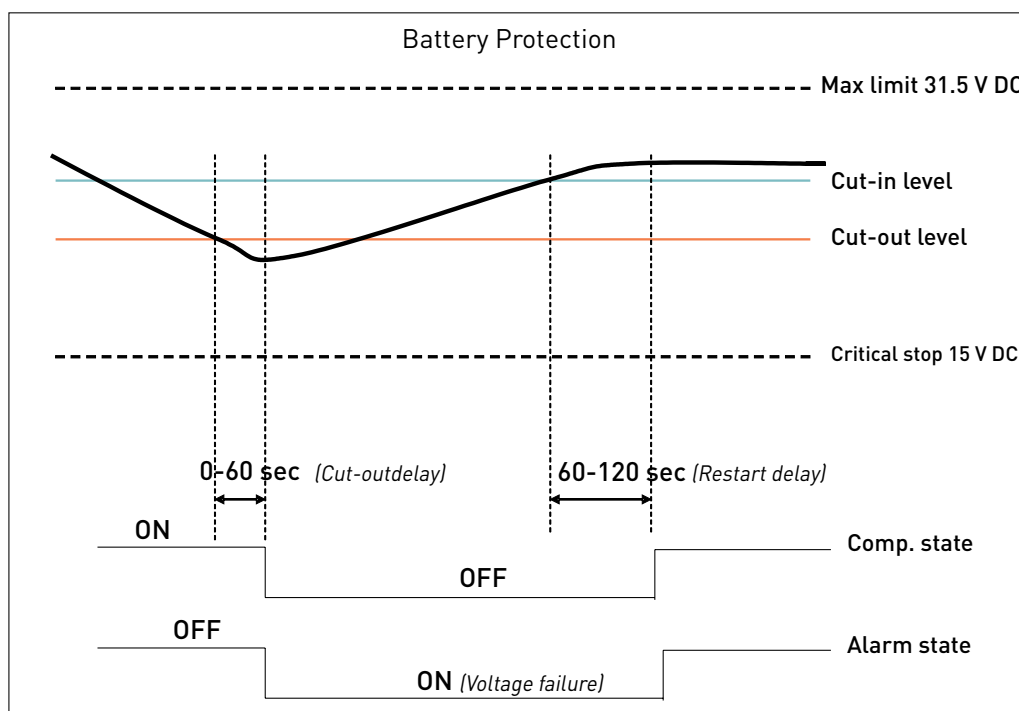

Settings

Name	Default	Max value	Min value	Step	Unit
Battery cutout level	21.3	27	19	0.1	Volt
Battery cutin diff.	3.9	10	0.5	0.1	Volt
Cutout delay	3	60	0	1	Seconds

Measurements

Name	Description	Step	Unit
Cut-in level	Calculated value. $Cutin = Coutout + Diff.$	0.1	Volt
Supply voltage	Real-time - voltage measured on + & - terminals	0.1	Volt

4.2.3 Compressor


The speed and thereby the capacity of the compressor is set using the Requested speed parameter. During start up, the compressor can be run at a lower speed, Start speed, than Requested speed. The duration of the period running at Start speed is set using the Start time parameter.

The compressor is protected against operation below minimum speed. Lubrication of the compressor will be very poor at excessively low speed and therefore low speed operation can lead to destruction of the compressor. Speed limits are: min 1850 rpm; max speed 4300 rpm.

If the compressor speed falls below the minimum or exceeds the maximum speed, the compressor will stop and an alarm Min speed failure or Max. speed failure will be sent. The compressor will try to restart after the set Restart time. The Restart time default is 60 sec.

The fans will continue to run.

Min & Max. Compressor Speed Protection

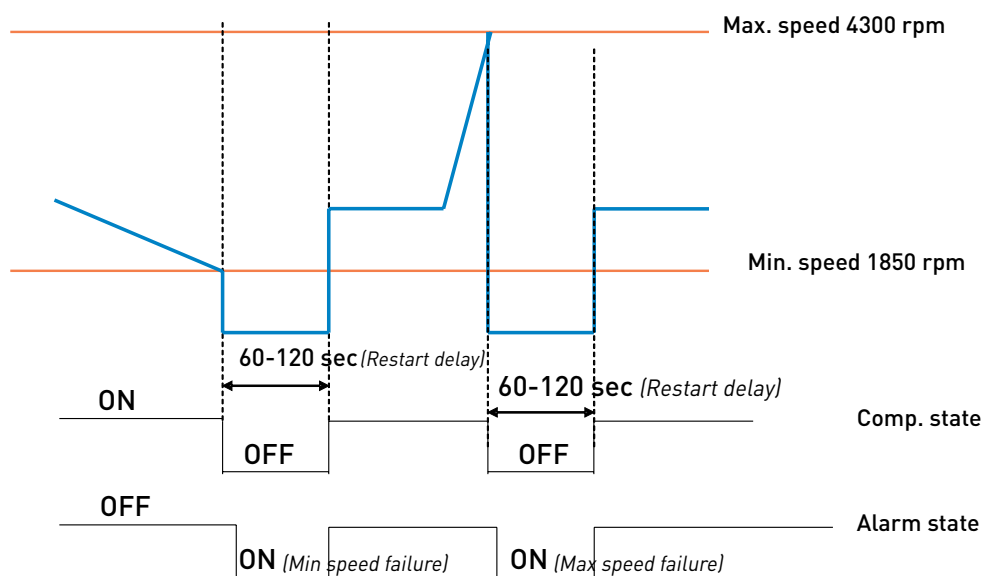

Settings

Name	Default	Max value	Min value	Step	Unit
Requested speed	4000	4000	2500	100	rpm
Start delay	4	240	2	1	Seconds
Start speed	2500	4000	2500	100	rpm
Start time	30	600	0	1	Seconds

Measurements

Name	Description	Step	Unit
Compressor speed	Real-time compressor speed(+/-10%)	1	rpm

4.2.4 Condenser Fan

The speed of the condenser fan can be controlled in order to save energy, reduce noise and optimize the fan operation.

The fan is synchronized with the compressor operation.

Start and stop delays can be set up as a function of the state of the parameter Thermostat. Furthermore, the fan can be set to run continuously (forced ON operation).

Some fan defects are detectable, and are displayed in the parameter Error.

The speed of the fan can be controlled in the range from 40% to 100%.

Settings

Name	Default	Max value	Min value	Step	Unit
Cond. Fan voltage	24	31	12	1	Volt
Fan speed	100	100	40	10	%
Fan start delay	0	240	0	1	Seconds
Fan stop delay	0	240	0	1	Seconds
Fan forced ON	OFF	ON	OFF	1	-
Detect missing fan	OFF	ON	OFF	1	-

Measurements

Name	Description	Step	Unit
Fan speed	Actual fan speed	1	%

4.2.5 Evaporator Fan

The speed of the evaporator fan can be controlled in order to save energy, reduce noise and optimize the fan operation.

The fan is synchronized with the compressor operation.

Start and stop delays can be set up as a function of the state of the parameter Thermostat.

Furthermore, the fan can be set to run continuously (forced ON operation).

Some fan defects are detectable, and are displayed in the parameter Error.

The speed of the fan can be controlled in the range from 40% to 100%.

Settings

Name	Default	Max value	Min value	Step	Unit
Evap. Fan voltage	24	31	12	1	Volt
Fan speed	100	100	40	10	%
Fan start delay	0	240	0	1	Seconds
Fan stop delay	0	240	0	1	Seconds
Fan forced ON	OFF	ON	OFF	1	-
Detect missing fan	OFF	ON	OFF	1	-

Measurements

Name	Description	Step	Unit
Fan speed	Real-time fan speed	1	%

4.2.6 Thermostat

Thermostat type

Two types of thermostat can be utilized for temperature control.

Electronic thermostat (NTC sensor)

Disconnected sensor error alarm (NTC sensor failure) is sent when the measured temperature is $> +100^{\circ}\text{C}$

Short circuited sensor error alarm (NTC sensor failure) is sent when the measured temperature $< -60^{\circ}\text{C}$

Mechanical thermostat

A mechanical ON/OFF thermostat can be connected at terminals C & T.

No detection of faulty thermostat is provided when an ON/OFF thermostat is used.

Automatic thermostat selection

The Thermostat parameter displays the type of thermostat connected to the controller: either a mechanical thermostat or NTC temperature sensor.

An NTC sensor is recommended for the temperature range -60°C to $+100^{\circ}\text{C}$

A mechanical thermostat is recommended for temperatures below -60°C and above $+100^{\circ}\text{C}$

Note: An NTC sensor error is not detectable when the NTC sensor is operating in automatic thermostat selection mode.

Settings

Name	Default	Max value	Min value	Step	Unit
Thermostat type	Auto	Electronic	-	-	-
Cutout temperature	+ 25	+ 40	-40	1	Celcius ($^{\circ}\text{C}$)
Difference	3	15	1	1	Kelvin (K)
Forced ON	OFF	ON	OFF	1	-

Measurements


Name	Description	Step	Unit
Runtime	Runtime is provided to record cooling-time (thermostat cut-in period). The runtime is updated during cooling, starting with 0 at start of cooling. During cooling OFF (Thermostat cut-out), the Runtime parameter will show the time for the last cooling period. Runtime is reset at the beginning of a cooling ON period, and at power-up.	1	Minutes
Actual temperature	Real-time air temperature when a NTC sensor is used. When a mechanical thermostat is used, only thermostat status ON or OFF is displayed.	-	$^{\circ}\text{C}$

4.2.7 ECO Function

Operation in ECO mode reduces energy consumption and noise by controlling compressor speed as a function of temperature. ECO mode can be selected only when using an NTC temperature sensor.

In ECO mode,

- when operating below ECO temperature, compressors run at the set ECO speed, and the Start speed setting will be overruled, if it differs from ECO speed.
- when operating above ECO temperature, the compressors run at Requested speed.

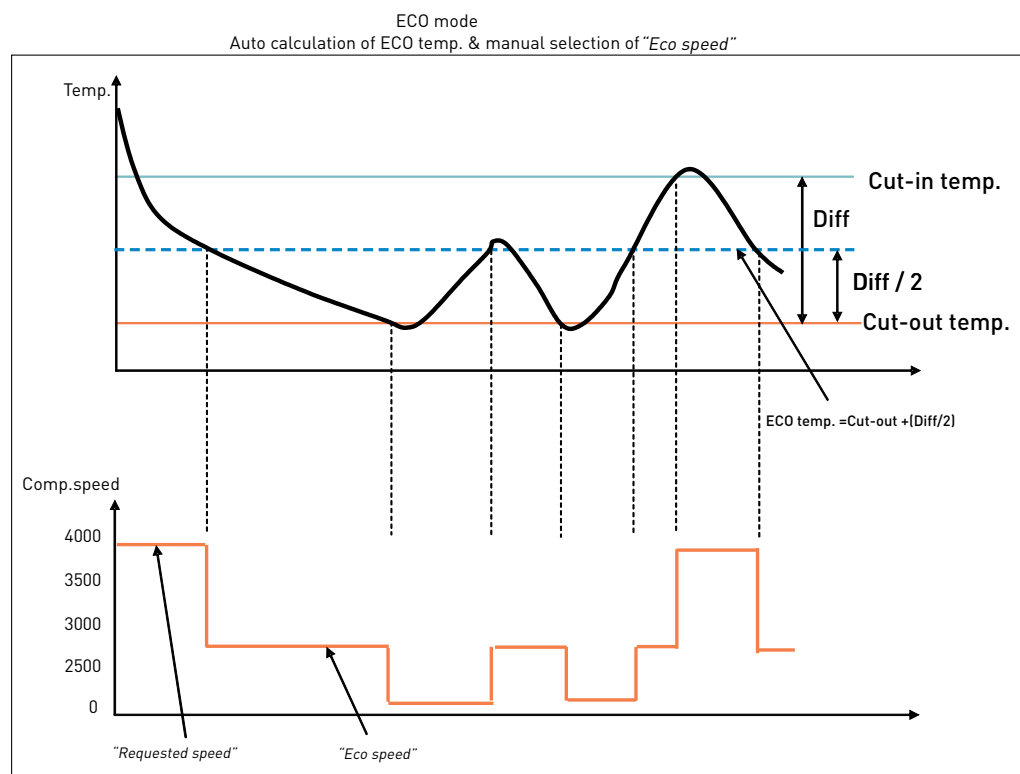

Settings:

Name	Default	Max value	Min value	Step	Unit
ECO mode	OFF	ON	OFF	1	
ECO speed BD350GH	2500	4000	2500	1	rpm
ECO temperature	25	-40	40	0.1	Celsius (°C)
Automatic ECO temperature	1	0	1	1	0 = OFF 1 = ON

4.2.8 Compressor Safety

In order to prevent the compressor from short cycling a minimum restart time is built in. After timeout of Compressor restart time a new start of the compressor is permitted.

Settings

Name	Default	Max value	Min value	Step	Unit
Compressor restart time	60	120	60	1	Seconds

4.2.9 Communication

Lost communication

In a network system with custom designed interface modules acting as master on the Modbus, it is desirable to stop the compressor from running when communication to the master is lost.

If communication is lost it will not be possible for the customer to stop the compressor as long as cooling is requested.

The function will stop the compressor after a certain time, (Communication time out) when there is no contact to the master controller. The stop is realized through the MainSwitch. The Main Switch will be set to OFF. It will remain OFF until the master controller sets it back to ON via Modbus.

Protection of settings

A coded privacy function protects customers' settings from being read by third parties. The code must be verified by entering twice.

Settings

Name	Default	Max value	Min value	Step	Unit
Node number	1	247	1	1	-
Bits per second	19200	19200	9600	9600	-
Communication	0	1	0	1	0 = Disabled 1 = Enabled
Communication timeout	900	7200	15	1	Seconds
Setting protection code & status	0	9999	0	1	-

4.2.10 Product Information

Settings

Name	Description
Unit name	Possible to fill in customer name for the unit when presented in PC software programme Tool4Cool®

Measurements

Name	Description
Vendor name	
Product code no	
Software version	
Unit ID	
Production date	
Lot no	
Serial no	

4.2.11 Customer Register

The customer register enables the user to set and change values in custom-designed interface modules.

These parameters are visible even when in protected mode.

Contact Secop for further information.

Settings

Name	Default	Max value	Min value	Step	Unit
Register 1	65535	65535	0	1	-
Register 10	65535	65535	0	1	-

4.2.12 Actual Error

The alarm function notifies the user when an error arises in the system, and implements measures which prevent damage to the refrigeration system.

This parameter is on view in all parameter groups.

Output

Name	Description
Actual error	0 = No error 1 = Voltage failure 2 = Fan failure 3 = Motor failure 4 = Min. speed failure 5 = Max. speed failure 6 = Thermal failure 7 = NTC Sensor Failure


4.2.13 Inverter Temperature (PCB)

The controller overheating protection system ensures that the controller does not operate at extremely high temperatures, because under these conditions the quality of the soldered joints will be endangered.

When the unit reaches 100°C the system will shut down and an alarm error (Alarm 6: Thermal failure) will be sent.

The system restarts automatically after the temperature has dropped below 90 °C. Hereafter the set delay Compressor restart delay must be terminated. The default duration is 60 sec.

This parameter is not included in the parameter groups, but is accessible on the BD 101N07xx Series 24 V DC controller main page only.

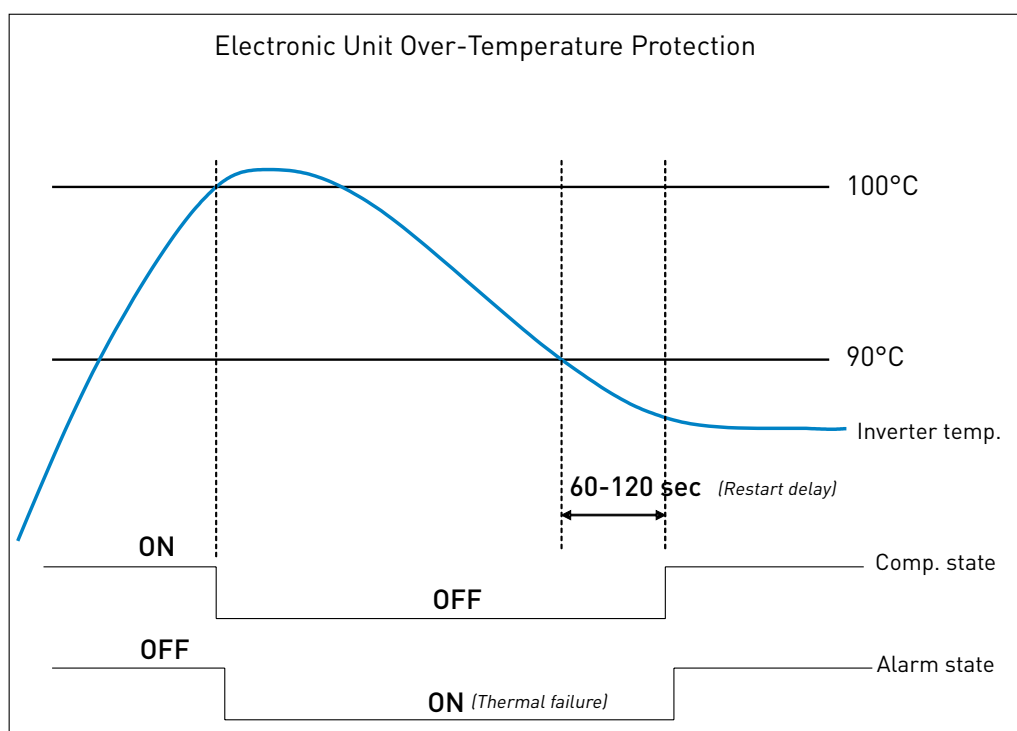

5. ORDERING

	Model	Code number	Description
Compressor	BD350GH 24 V DC supply	102Z3016	
	BD350/350GH 24 V DC supply - twin compressor	102Z3017	
Single-Pack	Electronic control unit 24 V DC	101N0715	40W/60W fan output, ECO function
	Temperature sensor, 470 mm, spade connectors	105N9612	accessories
	Temperature sensor, 1000 mm, spade connectors	105N9614	accessories
	Temperature sensor, 1500 mm, spade connectors	105N9616	accessories
	Secop One Wire/LIN gateway with cables & driver	105N9501	accessories
Industrial-Pack (I-Pack)	Electronic control unit 24 V DC	101N0714	36 pcs.
	Communication cable, 1500 mm, AMP connector	105N9545	100 pcs.
	Communication cable, 3000 mm, AMP connector	105N9547	50 pcs.
	Temperature sensor, 470 mm, spade connectors	105N9613	200 pcs.
	Temperature sensor, 1000 mm, spade connectors	105N9615	100 pcs.
	Temperature sensor, 1500 mm, spade connectors	105N9617	100 pcs.
	Temperature sensor, 400 mm, AMP connector	105N9611	200 pcs.
Software Package	Tool4Cool® LabEdition	free of charge	www.secop.com/tool4cool.html

TOOL4COOL® SOFTWARE - FLEXIBLE CONTROL SETTINGS

TOOL4COOL® is a unique PC software tool that enables you to precisely configure your Secop compressors to your cooling systems.

Via microprocessor-based controllers, TOOL4COOL® gives you easy access to all parameters. These can be changed, monitored, downloaded or uploaded to get the optimum performance out of your cooling system.

TOOL4COOL® covers a wide range of applications within parking cooling, light commercial cooling and transport cooling and much more. Using TOOL4COOL®, you can determine the basic specifications of your product, giving you the ability to clearly differentiate yourself in the market.



OUR JOURNEY SO FAR

1956 Production facility and headquarters in Flensburg, Germany founded	1970 Introduction of SC compressors. The birth of a standard setting platform in the light commercial market.	1990 Introduction NL compressors.	1992 Introduction PL compressors.	1999 Start of production with natural refrigerant R290 (Propane).	2005 Introduction GS compressors.	2008 Production facility in Wuqing, China founded.	2013 Introduction of the XV compressor. Opening a new chapter in refrigeration history.
1958 Start up production of PW compressors.	1972 Introduction FR compressors.	1977 Introduction TL and BD compressors.	1993 Start of production with natural refrigerant R600a (Isobutane). Production facility in Crnomelj, Slovenia founded.	2002 Production facility in Zlate Moravce, Slovakia founded.	2010 Introduction SLV-CNK.2 and SLV-CLK.2 variable speed compressors. Introduction BD1.4F Micro DC compressor. Introduction of DLX and NLU compressors.		

